





Pumpenträger/ Kupplungen

für Aussenzahnradpumpen Baugröße 0 - 3



Aluminium Pumpenträger und Aluminium Klauenkupplungen

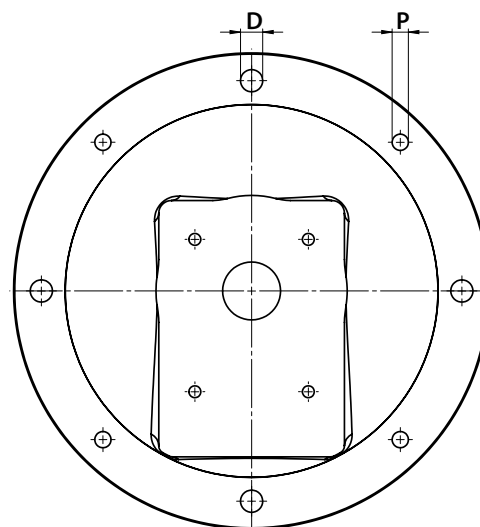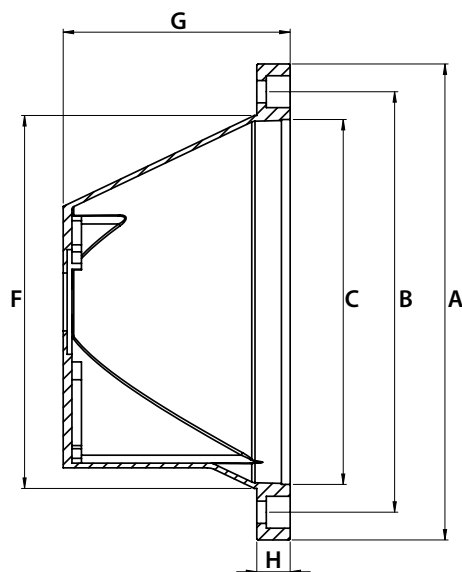

Bestell-Nr.	Code	Maße in mm							
		A	B	C	D	F	G	H	P
422-220-01000	LS140	140	115	95	10	100	60	11	M8
422-220-01050	LS141	140	115	95	10	100	60	11	M8
422-220-01100	LS142	140	115	95	10	100	60	11	M8
422-220-01200	LS160	160	130	110	10	110	70	14	M8
422-220-01250	LS161	160	130	110	10	110	70	14	M8
422-220-01300	LS162	160	130	110	10	110	70	14	M8
422-220-01400	LS210	200	165	130	12	135	87	15	M10
422-220-01650	LS201	200	165	130	12	135	95	15	M10
422-220-01700	LS202	200	165	130	12	135	95	15	M10
422-220-01750	LS203	200	165	130	12	135	95	15	M10
422-220-01950	LS250	250	215	180	14	185	105	21	M12
422-220-02000	LS251	250	215	180	14	185	105	21	M12
422-220-02050	LS252	250	215	180	14	185	105	21	M12
422-220-02350	LS256	250	215	180	14	185	115	21	M12
422-220-02550	LS300	300	265	230	14	238	143	21	M12
422-220-02700	LS303	300	265	230	14	238	143	21	M12
422-220-03000	LS350	350	300	250	18	253	178	25	M16
422-220-03150	LS353	350	300	250	18	253	178	25	M16
422-220-03500	LS457	450	400	350	18	350	218	25	M16
422-230-01550	LSE207	200	165	130	12	135	126	16	M10
422-230-03100	LSE402	400	350	300	18	299	188	25	M16

Baugröße 0

Einpass: Ø22mm

Befestigung: 2 Loch 66mm

Welle: zylindrisch Ø7

E-Motor Antriebsleistung in kW	Motor- größe	Motor Welle in mm	Kupplungssatz	Pumpenträger
0,12	63	11	422-005-01050	422-220-01000
0,18	63	11	422-005-01050	422-220-01000
0,25	71	14	422-005-01350	422-220-01200
0,37	71	14	422-005-01350	422-220-01200
0,55	80	19	422-005-01650	422-220-01400
0,75	80	19	422-005-01650	422-220-01400

Baugröße 1

Einpass: Ø25,4mm

Befestigung: 4 Loch 52,4mm x 71,9mm

Welle: konisch 1:8

0,12	63	11	422-005-01100	422-220-01050
0,18	63	11	422-005-01100	422-220-01050
0,25	71	14	422-005-01400	422-220-01250
0,37	71	14	422-005-01400	422-220-01250
0,55	80	19	422-005-02000	422-220-01650
0,75	80	19	422-005-02000	422-220-01650
1,1	90S	24	422-005-02750	422-220-01650
1,5	90L	24	422-005-02750	422-220-01650
2,2	100L	28	422-005-03200	422-220-01950
3	100L	28	422-005-03200	422-220-01950
4	112M	28	422-005-03200	422-220-01950

Baugröße 1

Technical drawing of a pump head and shaft assembly. The drawing includes a side view of the shaft with dimensions: M 10 x 1 thread, 3mm length, and a diameter of 14mm. The main view shows a rectangular pump head with dimensions: 56mm width, 73mm height, 48.5mm mounting hole spacing, 30mm central inlet diameter, 6.5mm mounting hole diameter, and 8.4mm mounting hole offset. The head has four mounting holes and a central inlet.

Einpass: Ø30mm


Befestigung: 4 Loch 73mm x 56mm

Welle: konisch 1:8 - verstärkt

0,12	63	11	422-005-01200	422-220-01100
0,18	63	11	422-005-01200	422-220-01100
0,25	71	14	422-005-01500	422-220-01300
0,37	71	14	422-005-01500	422-220-01300
0,55	80	19	422-005-02100	422-220-01700
0,75	80	19	422-005-02100	422-220-01700
1,1	90S	24	422-005-02850	422-220-01700
1,5	90L	24	422-005-02850	422-220-01700
2,2	100L	28	422-005-03300	422-220-02000
3	100L	28	422-005-03300	422-220-02000
4	112M	28	422-005-03300	422-220-02000

Aluminium Pumpenträger und Aluminium Klauenkupplungen


Baugröße 2

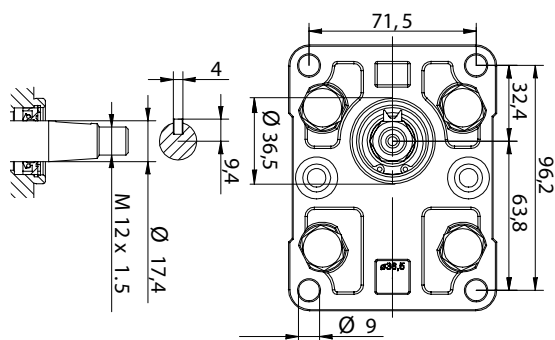

Einpass: Ø36,5mm
Befestigung: 4 Loch 71,5mm x 96,2mm
Welle: konisch 1:8

E-Motor Antriebsleistung in kW	Motor- größe	Motor Welle in mm	Kupplungssatz	Pumpenträger
0,55	80	19	422-005-02200	422-220-01750
0,75	80	19	422-005-02200	422-220-01750
1,1	90S	24	422-005-02950	422-220-01750
1,5	90L	24	422-005-02950	422-220-01750
2,2	100L	28	422-005-03350	422-220-02050
3	100L	28	422-005-03350	422-220-02050
4	112M	28	422-005-03350	422-220-02050
5,5	132S	38	422-005-03950	422-220-02550
7,5	132M	38	422-005-03950	422-220-02550
11	160M	42	422-005-04400	422-220-03000
15	160L	42	422-005-04400	422-220-03000
18,5	180M	48	422-005-04700	422-220-03000
22	180L	48	422-005-04700	422-220-03000

Baugröße 3

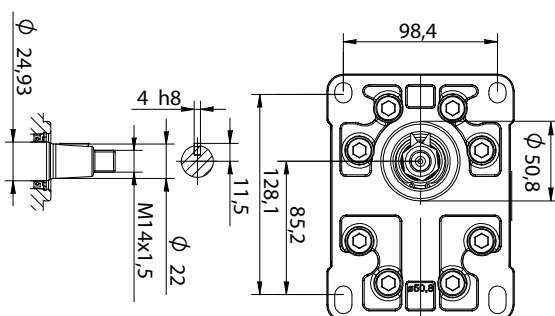


Einpass: Ø50,8mm
Befestigung: 4 Loch 98,4mm x 128,1mm
Welle: konisch 1:8

0,55	80	19	422-005-02400	422-230-01550
0,75	80	19	422-005-02400	422-230-01550
1,1	90S	24	422-005-03050	422-230-01550
1,5	90L	24	422-005-03050	422-230-01550
2,2	100L	28	422-005-03550	422-220-02350
3	100L	28	422-005-03550	422-220-02350
4	112M	28	422-005-03550	422-220-02350
5,5	132S	38	422-005-04050	422-220-02700
7,5	132M	38	422-005-04050	422-220-02700
11	160M	42	422-005-04450	422-220-03150
15	160L	42	422-005-04450	422-220-03150
18,5	180M	48	422-005-04750	422-220-03150
22	180L	48	422-005-04750	422-220-03150
30	200L	55	422-005-05000	422-230-03100
37	225S	60	422-005-05200	422-220-03500
45	225M	60	422-005-05200	422-220-03500

Mit Druck entspannter umgehen

Ihr Spezialist für alle Aufgaben rund um die Hydraulik und Pneumatik

JETZT HIER KLICKEN UND ONLINE ANFRAGEN!

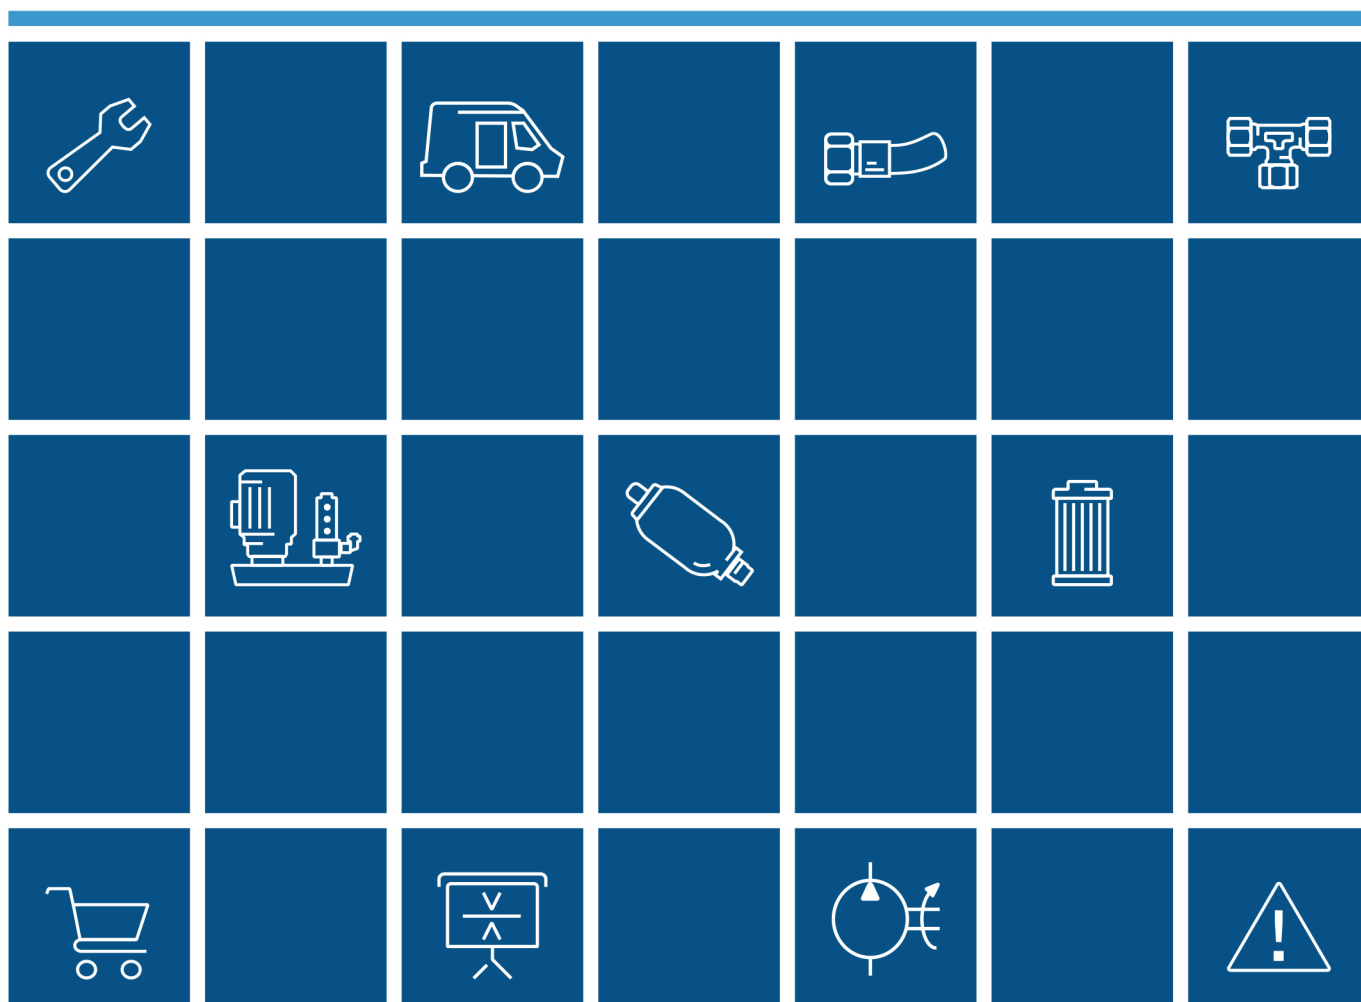

Weitere Informationen erhalten Sie hier:



Telefon 0 70 31.49 94-0
Telefax 0 70 31.49 94-90
verkauf@hydrobar.de

Hydrobar®
Hydraulik und Pneumatik GmbH
Umberto-Nobile-Str. 16
71063 Sindelfingen (Flugfeld)
www.hydrobar.de

